




A - Bank

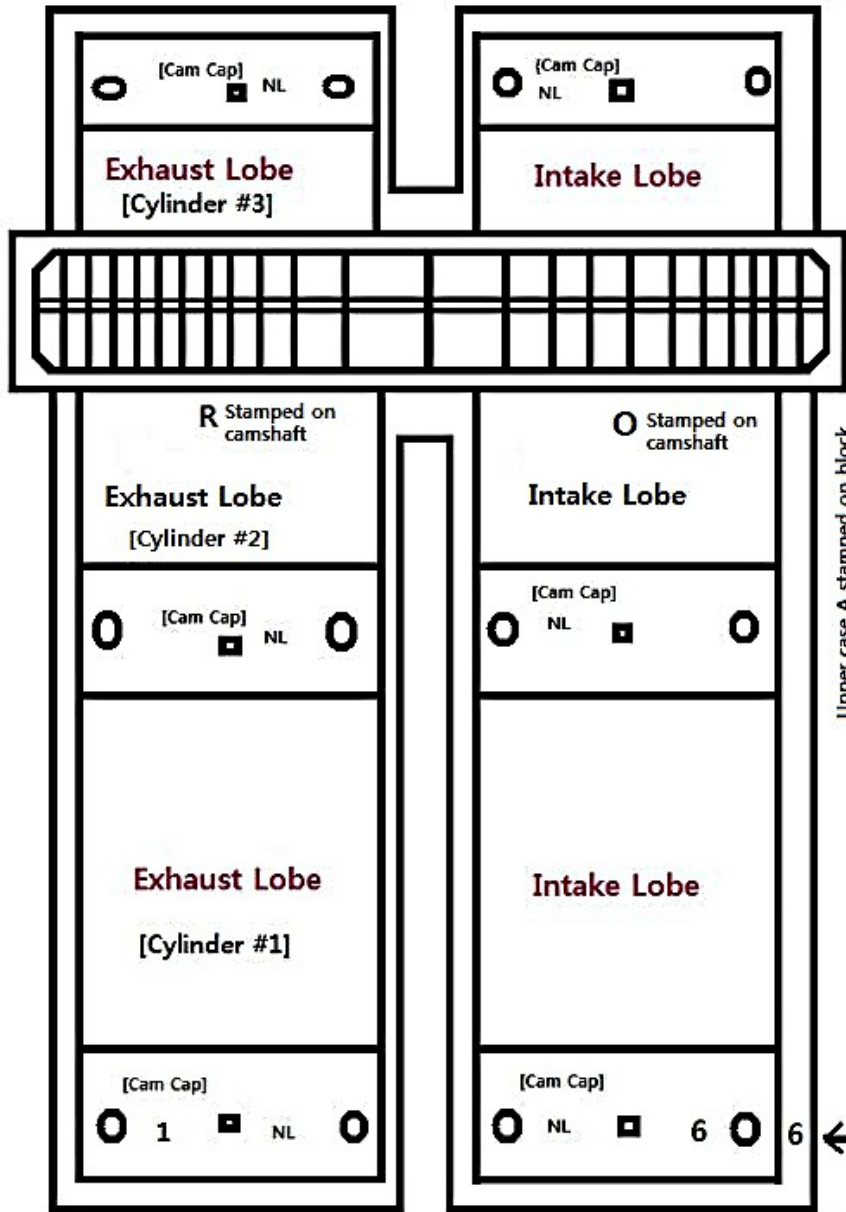

Upper case A stamped on block & cylinder head


Engine Midline

Fly Wheel

Center of Cam Cap - 
Cam Cap Bolt - 

The 6 is stamped into the cylinder head. These two 6s must align at this orientation.

Cam cap nuts torqued to 20 foot-pounds or 27 newton meters

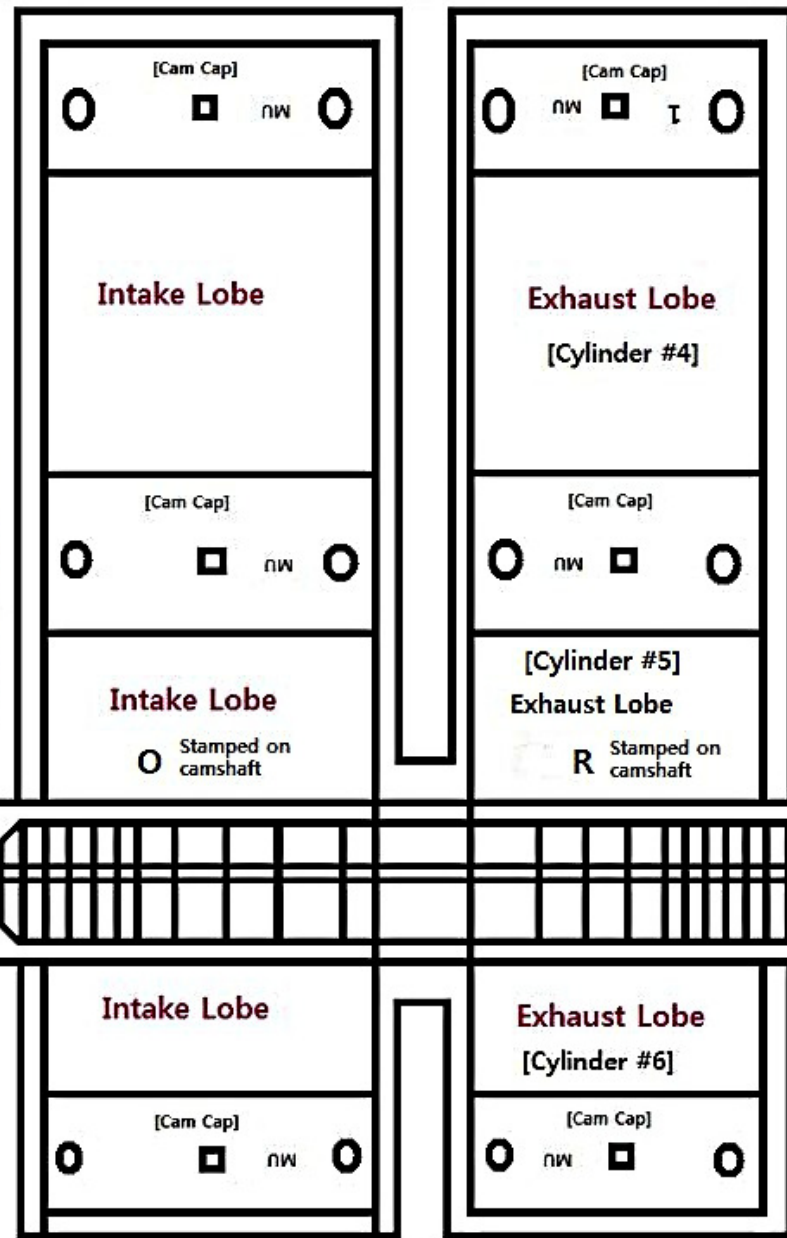

Upper case B stamped on the block & cylinder head

B - Bank

The letters MU are in upper case form. The orientation of these letters is correct on the cam caps. MU is also stamped on the cylinder head or engine block just above #5 spark plug.